


導波管形中電力ダミーロード

■ 中電力無反射終端器

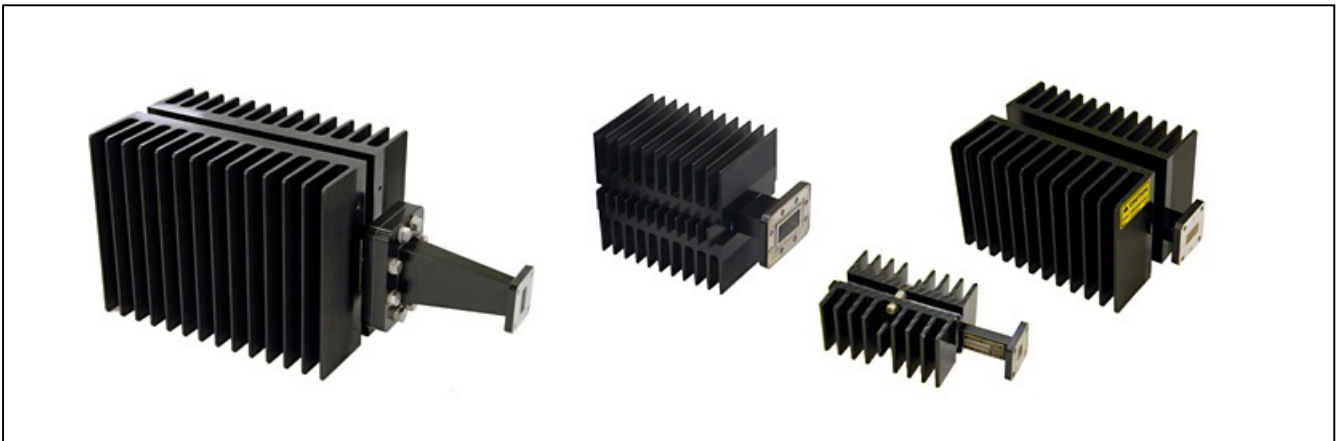

形式	周波数範囲 (GHz)	VSWR	許容電力 (W)	使用導波管	測定周波数(GHz)	導波管長 (mm)
WDL-025	1.7~2.6	1.1	300	WRJ-2	1.7 2.15 2.6	450
WDL-035	2.6~3.95		200	WRJ-3	2.6 3.3 3.95	300
WDL-045	3.3~4.9		150	WRJ-4	3.3 4.1 4.9	250
WDL-055	3.95~5.85		100	WRJ-5	3.95 4.9 5.85	200
WDL-065	4.9~7.05		80	WRJ-6	4.9 6.0 7.05	200
WDL-075	5.8~8.2		60	WRJ-7	5.8 7.0 8.2	150
WDL-095	7.05~10.0		50	WRJ-9	7.05 8.5 10.0	150
WDL-105	8.2~12.4		30	WRJ-10	8.2 10.3 12.4	130
WDL-125	10.0~15.0	1.15	30	WRJ-120	10.0 12.5 15.0	125
WDL-155	12.4~18.0		20	WRJ-140	12.4 15.0 18.0	100
WDL-185	15~22	1.2	15	WRJ-180	15 18 22	85
WDL-245	18~26.5		10	WRJ-220	18 22 26.5	75
WDL-265	22~33		10	WRJ-260	22 28 33	75
WDL-345	26.5~40		10	WRJ-320	26.5 33 38	75
WDL-505	40~60		10	WRJ-500	50	75
WDL-605	50~75		10	WRJ-620	65	65
WDL-755	60~90		10	WRJ-740	70	65